


Product data sheet

Item No. 56.703.6055.0

Multi-tier terminal WKFN 2,5 E1/2/35

Multi-tier terminal block with spring clamp connection for mounting on TS 35, nominal cross section 2.5 mm², width 5 mm, color gray

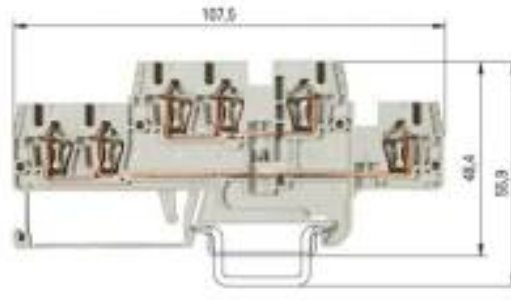

Item No.	56.703.6055.0
EAN	4015573718517
Order Unit	50 Piece(s)

Certificates / Approvals



Technical data

Note

Remark to rated voltage	CSA 300V/600V
-------------------------	---------------

General

Nominal cross section	2.5 mm ²
Colour	Grey
Number of levels	2
Number of clamp positions per level	3
Width/grid dimension	5 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated current	22 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	107.5 mm

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	0.13 mm ²
Maximum cross section solid	4 mm ²
Minimum cross section fine stranded	0.13 mm ²
Maximum cross section fine stranded	2.5 mm ²
Wire strip length	11 mm

Technical Data UL/CSA

Cross section UL	22-12 AWG
Voltage UL	300 V
Current factory wiring	20 A
Current field wiring	20 A
Cross section CSA	24-12 AWG
Voltage CSA	300 V
Current CSA	24 A

Technical drawing

