


Product data sheet

Item No. 56.703.9053.0

Earth terminal WKF 2,5 SL/35

Ground DIN rail terminal block with spring clamp connection for mounting on TS 35, nominal cross section 2.5 mm², width 5 mm, colorgreen/yellow

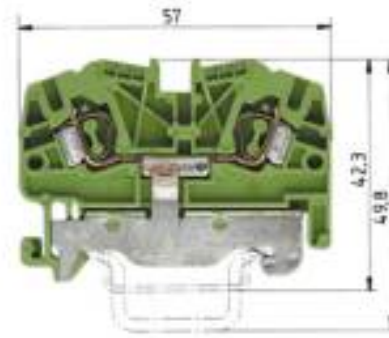

Item No.	56.703.9053.0
EAN	4015573347687
Order Unit	100 Piece(s)

Certificates / Approvals



Technical data

General

Nominal cross section	2.5 mm ²
Colour	Green/yellow
Number of levels	1
Number of clamp positions per level	2
Width/grid dimension	5 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	57 mm

Connection Data


Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	0.13 mm ²
Maximum cross section solid	4 mm ²
Minimum cross section fine stranded	0.13 mm ²

Maximum cross section fine stranded	2.5 mm ²
Wire strip length	11 mm

Technical Data UL/CSA

Cross section UL	22-12 AWG
Cross section CSA	24-12 AWG

Technical drawing

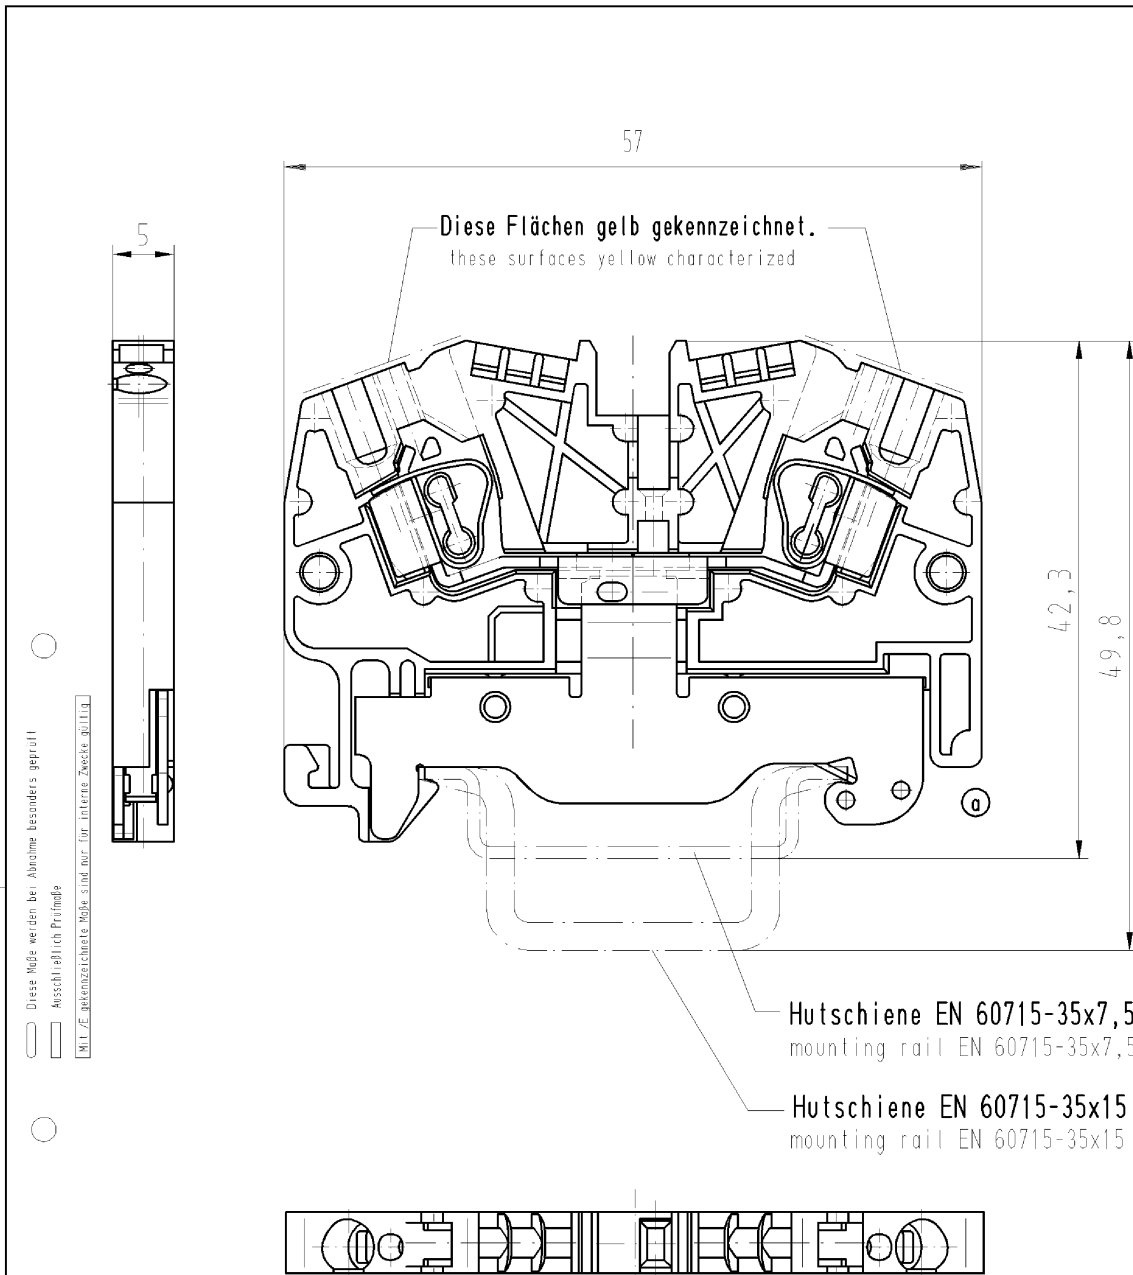

Weitere Daten siehe Katalog
further data see catalog

Freitoleranz nach DIN		CAD - Zeichnung, keine manuellen Änderungen			i.Verwendung: -		Bl.: 1 von 1	
	Maßstab	Farbe: grün colour green		2002	Tag	Name		Zeichnung Nr.
	2:1			Entworfen	18.07.	Schneiderb.		56.703.9053.0 01K
				Geprüft	-	-		Index
				Normgepr.	-	-		Ersatz für: -
		wieland		Typ		Benennung		
		Elektrische Verbindungen		WKF 2,5 SL		SCHUTZLEITERKLEMME		
				/35		Schraublos PE-terminal screwless		
Änderung								
a	29.06.2004/							
Buchstabe	Datum / Blatt							

567039053001K_4 CADW20 Bauer 2004-06-29T11:05:41 1:000

