


Product data sheet

Item No. 56.704.9055.0

Earth terminal WKFN 4 SL/35

Ground DIN rail terminal block with spring clamp connection for mounting on TS 35, nominal cross section 4 mm<sup>2</sup>, width 6 mm, color green/yellow

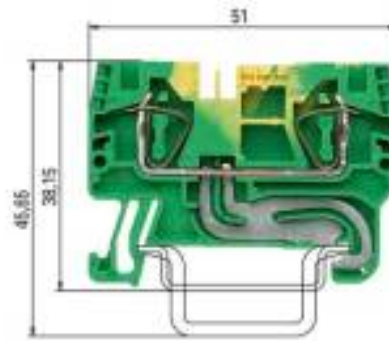

Item No.	56.704.9055.0
EAN	4015573767171
Order Unit	100 Piece(s)

Certificates / Approvals



Technical data

General

Nominal cross section	4 mm <sup>2</sup>
Colour	Green/yellow
Number of levels	1
Number of clamp positions per level	2
Width/grid dimension	6 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	51 mm

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	0.13 mm <sup>2</sup>
Maximum cross section solid	6 mm <sup>2</sup>
Minimum cross section fine stranded	0.13 mm <sup>2</sup>

Maximum cross section fine stranded	4 mm <sup>2</sup>
Wire strip length	11 mm

**Technical Data UL/CSA**

Cross section CSA	24-10 AWG
-------------------	-----------

**Technical drawing**

01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 31 - 32 - 33 - 34 - 35 - 36 - 37 - 38 - 39 - 40 - 41 - 42 - 43 - 44 - 45 - 46 - 47 - 48 - 49 - 50 - 51 - 52 - 53 - 54 - 55 - 56 - 57 - 58 - 59 - 60 - 61 - 62 - 63 - 64 - 65 - 66 - 67 - 68 - 69 - 70 - 71 - 72 - 73 - 74 - 75 - 76 - 77 - 78 - 79 - 80 - 81 - 82 - 83 - 84 - 85 - 86 - 87 - 88 - 89 - 90 - 91 - 92 - 93 - 94 - 95 - 96 - 97 - 98 - 99 - 100 - 101 - 102 - 103 - 104 - 105 - 106 - 107 - 108 - 109 - 110 - 111 - 112 - 113 - 114 - 115 - 116 - 117 - 118 - 119 - 120 - 121 - 122 - 123 - 124 - 125 - 126 - 127 - 128 - 129 - 130

Hutschiene EN60715-35x7,5  
mounting rail EN60715-35x7,5

Hutschiene EN60715-35x15  
mounting rail EN60715-35x15

M1:1

01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 31 - 32 - 33 - 34 - 35 - 36 - 37 - 38 - 39 - 40 - 41 - 42 - 43 - 44 - 45 - 46 - 47 - 48 - 49 - 50 - 51 - 52 - 53 - 54 - 55 - 56 - 57 - 58 - 59 - 60 - 61 - 62 - 63 - 64 - 65 - 66 - 67 - 68 - 69 - 70 - 71 - 72 - 73 - 74 - 75 - 76 - 77 - 78 - 79 - 80 - 81 - 82 - 83 - 84 - 85 - 86 - 87 - 88 - 89 - 90 - 91 - 92 - 93 - 94 - 95 - 96 - 97 - 98 - 99 - 100 - 101 - 102 - 103 - 104 - 105 - 106 - 107 - 108 - 109 - 110 - 111 - 112 - 113 - 114 - 115 - 116 - 117 - 118 - 119 - 120 - 121 - 122 - 123 - 124 - 125 - 126 - 127 - 128 - 129 - 130

Weitere Daten siehe Katalog  
further data see catalog

Freifertigung nach DIN		SBO - Zeichnung, keine mechanischen Änderungen		1. Verwendung		Bl. 1	von 1
ModStab	2:1	Material und Oberfläche: Farbe: grün/gelb Lackart: grün/gelb	2004	Tag	Werte	Zeichnung Nr. 56.704.9055.0 01K	
			Erstellt	15.03.	Blatt 1	Ersatz für -	
			Geprüft				
			Montage				
		<b>wieland</b>					
		Elektrische Verbindungen					
		Typ WKFN 4		Benennung		SCHUTZLEITERKLEMME	
		SL/35				Tesis Pro - Federklemmführung 4mm <sup>2</sup> earth terminal with spring clamp connection	