


Product data sheet

Item No. 56.704.9355.0

Earth terminal WKFN 4 D1/2/SL/35

Ground DIN rail terminal block with spring clamp connection for mounting on TS 35, nominal cross section 4 mm², width 6 mm, color green/yellow

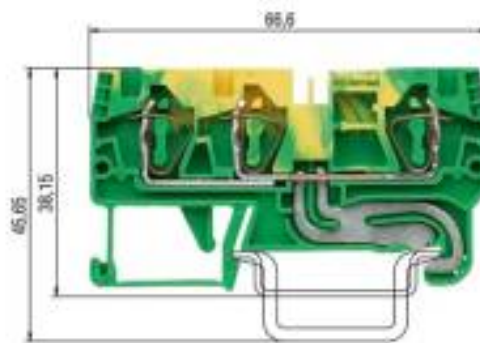

Item No.	56.704.9355.0
EAN	4015573767201
Order Unit	100 Piece(s)

Certificates / Approvals



Technical data

General

Nominal cross section	4 mm ²
Colour	Green/yellow
Number of levels	1
Number of clamp positions per level	3
Width/grid dimension	6 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	66.6 mm

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	0.13 mm ²
Maximum cross section solid	6 mm ²
Minimum cross section fine stranded	0.13 mm ²

Maximum cross section fine stranded	4 mm ²
Wire strip length	11 mm

Technical Data UL/CSA

Cross section CSA	24-10 AWG
-------------------	-----------

Technical drawing

Hutschiene EN60715-35x7,5
 mounting rail EN60715-35x7,5
 Hutschiene EN60715-35x15
 mounting rail EN60715-35x15

Weitere Daten siehe Katalog
 further data see catalog

Freigelegt nach	ISO - Zeichnung, keine anderen Änderungen			1. Verwendung		Bl. 1	von 1
ModStab	2:1	Material und Oberfläche: Farbe: grün/gelb Lack: grün/gelb	2004	Tag	Werte	Zeichnung Nr. 56.704.9355.0 01K	
Verf.	Stg	mit	Erstellt	15.03.	Revis.	Ersatz für -	
Benennung	wieland Elektrische Verbindungen		Typ	WKFN 4 01/2/SL/35			
Änderung			Benennung DUO_SCHUTZLEITERKLEMM tasis Pro - Federkraftverführung 4mm ² duo-earth terminal with spring clamp connection				