


Product data sheet

Item No. 56.710.0053.0

Feed-through terminal WKF 10/35

Feed-through DIN rail terminal block with spring clamp connection for mounting on TS 35, nominal cross section 10 mm², width 10 mm, color gray

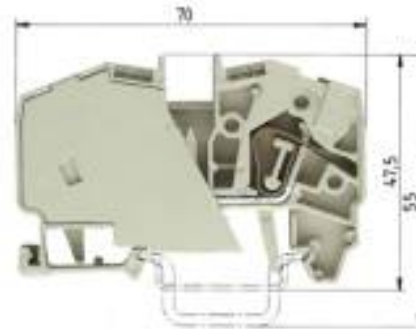

Item No.	56.710.0053.0
EAN	4015573501638
Order Unit	50 Piece(s)

Certificates / Approvals



Technical data

General

Nominal cross section	10 mm ²
Colour	Grey
Number of levels	1
Number of clamp positions per level	2
Width/grid dimension	10 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated current	57 A
Rated voltage	800 V
Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	No
Type of insulation material	Thermoplastic
Length	70 mm

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	2.5 mm ²

Maximum cross section solid	10 mm ²
Minimum cross section fine stranded	2.5 mm ²
Maximum cross section fine stranded	10 mm ²
Wire strip length	13 mm

Technical Data UL/CSA

Cross section UL	14-8 AWG
Voltage UL	600 V
Current factory wiring	55 A
Current field wiring	55 A
Cross section CSA	14-8 AWG
Voltage CSA	600 V
Current CSA	65 A

Technical drawing

Ansicht ohne Isolierplatte
opinion without insulating clamp

Hutschiene EN 60715-35x7,5
mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
mounting rail EN 60715-35x15

Weitere Daten siehe Katalog
further data see catalog

Teile.-Nr. part-nr.	Farbe colour	Typ type	Freitoleranz nach DIN	Maßstab	Werkstoff und Oberfläche	2002	Tag	Name	1. Verwendungs-	Bl. 1	nr. 1
56.710.0053.0	grau grey	WKF 10/35	/	x		Elektronen	12.11.	Schmidrich	T	56.710.0053.0 01K a	
56.710.0053.6	blau blue	WKF 10/35 BLAU	a	23.09.2004					Ersatz für	DURCHGANGSKLEMME terminal (screwless) schraublos	