


Product data sheet

Item No. 56.716.9053.0

Earth terminal WKF 16 SL/35

Ground DIN rail terminal block with spring clamp connection for mounting on TS 35, nominal cross section 16 mm², width 12 mm, colorgreen/yellow

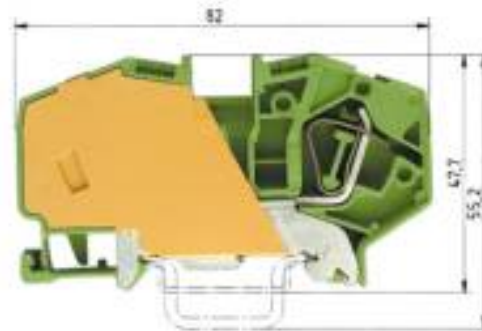

Item No.	56.716.9053.0
EAN	4015573501805
Order Unit	50 Piece(s)

Certificates / Approvals



Technical data

General

Nominal cross section	16 mm ²
Colour	Green/yellow
Number of levels	1
Number of clamp positions per level	2
Width/grid dimension	12 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	No
Type of insulation material	Thermoplastic
Length	82 mm

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	4 mm ²
Maximum cross section solid	10 mm ²
Minimum cross section fine stranded	4 mm ²

Maximum cross section fine stranded	16 mm ²
Minimum cross section stranded	16 mm ²
Maximum cross section stranded	16 mm ²
Wire strip length	15 mm

Technical Data UL/CSA

Cross section UL	24-4 AWG
Cross section CSA	12-4 AWG

Technical drawing

82
Ansicht ohne Isolierplatte
view without insulating cover

12

47,7
55,2

Hutschiene EN 60715-35x7,5
mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
mounting rail EN 60715-35x15

Isolierplatte (Farbe: gelb)
insulating cover (colour: yellow)

Weitere Daten siehe Katalog
further data see catalog

Eigenschaften nach DIN		ZSB - Zeichnung, keine metall. Ion. Änderungen			T. Anwendung		Bl. 1 von 1	
Modell	Werkstoff und Oberfläche	2007	Tag	Name	Zeichnung Nr.		Index	
x	Farbe: grün color: green	13.11.		Schneider	56.716.9053.0 01K		a	
	wieland	Typ	Bezeichnung		Ersatz für...			
	Blattfläche Verbindungen	WK 16 SL/ 35	SCHUTZLEITERKLEMME		earth lead terminal (screwless) schraublos			
	Änderung							