


## Product data sheet

Item No. 57.504.9155.0

### Earth terminal WK 4 / D2/2 SL / U /V0

Ground DIN rail terminal block with screw connection for mounting on TS 35 and TS 32, nominal cross section 4 mm<sup>2</sup>, width 6 mm, color green/yellow

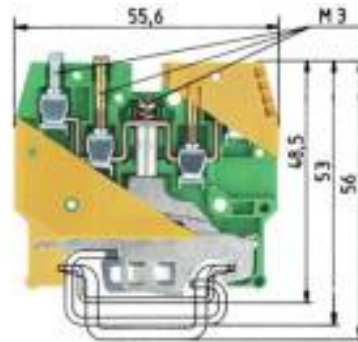

Item No.	57.504.9155.0
EAN	4015573504134
Order Unit	100 Piece(s)

### Certificates / Approvals



### Technical data

#### General

Nominal cross section	4 mm <sup>2</sup>
Colour	Green/yellow
Number of levels	1
Number of clamp positions per level	4
Width/grid dimension	6 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail)/G-rail
Terminal blocks for electrical installations	Yes

#### Technical data

Rated impulse voltage	6 kV
Pollution degree	3
Closing plate required	No
Type of insulation material	Thermoplastic
Length	55.6 mm

#### Connection Data

Connection type 1	Screw connection
Connection type 2	Screw connection
Minimum cross section solid	0.5 mm <sup>2</sup>
Maximum cross section solid	6 mm <sup>2</sup>
Minimum cross section fine stranded	0.5 mm <sup>2</sup>



Maximum cross section fine stranded	4 mm <sup>2</sup>
Wire strip length	9 mm
Torque conductor mounting	0.5 Nm
Torque rail mounting	0,5

Technical Data UL/CSA

Cross section UL	22-10 AWG
Cross section CSA	20-12 AWG

Technical drawing

Dimensions: 39,3, 30,3, 31,8, 22,8, 55,6, 50,4, 57,9

Callouts: a, b, c

Color callouts: Farbe: grün colour: green, Farbe: gelb colour: yellow

Labels: Hutschiene EN 60715-35x7,5 mounting rail EN 60715-35x7,5; Hutschiene EN 60715-35x15 mounting rail EN 60715-35x15

Text: Weitere Daten siehe Katalog further data see catalog

Teile - Nr. Part-number		Typ type	
57.504.9155.0		WK4/D2/2 SL VO	

Tolerierung nach DIN 7167/Tolerance system acc. to DIN 7167. (This DIN-standard describes the envelope principle. According to the envelope principle the deviations of form and position are limited by the size tolerances.)				Stoffe Stoffverbot- und Deklarationsliste nach UL-TM-95/03 ist einzuhalten. Conformity with Wieland document UL-TM-95/03 (list of prohibited / restricted hazardous substances) to be observed!			
Frähtoleranz nach DIN ISO 2769 - m		CAD-Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
Werkstoff/Material: 2004		Tag/Date: 14.10.		Name: Schmitt J.		Zeichnung Nr./Drawing No. T 57.504.9155.0 01K c	
Modul/Serie: *		Einsatz für/Replacement for: -		Type: Duo-earth terminal		Benennung/Titel: DUO-SCHUTZLEITERKLEMME	
No. 02.06.2015/ 01.03.2017/ 25.01.2017		mm (D)/Serif.		Type: Duo-earth terminal		Benennung/Titel: DUO-SCHUTZLEITERKLEMME	
Index: 10mm / Blatt 1002 / Blatt		Wieland Elektrische Verbindungen		Type: Duo-earth terminal		Benennung/Titel: DUO-SCHUTZLEITERKLEMME	
Änderung/Revision		Wieland Elektrische Verbindungen		Type: Duo-earth terminal		Benennung/Titel: DUO-SCHUTZLEITERKLEMME	

575049155001K\_2 CADW3026 Hollet 2115-06-02T12:10:33 1x000