

Product data sheet

Item No. 96.232.7000.1

Cable assembly RST20I3K1BS 15P 70SW

RST 20i3/2 extension cable female - male, 3 pole, assembled with shrinkage tube, application 250V, 16A, cable type H05VV-F, length 7.0m, cross section 1.5mm², coding-color black



| | |
|------------|---------------|
| Item No. | 96.232.7000.1 |
| EAN | 4015573761209 |
| Order Unit | 10 Piece(s) |

Certificates / Approvals



Technical data

General

| | |
|--|----------|
| Rated current | 16 A |
| Rated voltage | 250 V |
| Rated impulse voltage | 4 kV |
| Pollution degree | 3 |
| Mechanical coding | Code 0 |
| Continuity resistor | 3 mOhm |
| Lockable | Yes |
| Color of coding/ contact carrier | Black |
| Marking of poles | L, N, PE |
| Color of housing inclusive strain relief | Black |

Model

| | |
|---------------------------------|---------------------|
| type of construction | Shrinkage tube |
| Nominal cross section conductor | 1.5 mm ² |
| Degree of protection (IP) | IP66/68 (3m;2h) |
| Cable type | H05VV-F |
| Cable colour | Black |
| Cable diameter | 8.3 mm |

| | |
|---------------------|-----------------|
| Version of cable | Female - male |
| Type of cord set | Extension cable |
| Version cable end 1 | female |
| Version cable end 2 | male |
| Screened | No |

Material


| | |
|--|---------------|
| Surface finish | Silver-plated |
| Halogen free | No |
| Continuous temperature of cable | 70 °C |
| Insulation components continuous temperature | 100 °C |

Dimensions

| | |
|--------------|-----|
| Total length | 7 m |
|--------------|-----|

Technical drawing

| | | | | | | | | | | |
|--|--|--|--|--|--|--|--------------------------------------|--|--|--|
| | | | .F Farbe colour .0 lichtgrau light grey .1 schwarz black | | Codierung Buchse female *U* PE L | | Codierung Stecker male *P* N L | | Verriegelung locking 05.583.2953 schwarz / black 05.583.2954 schwarz / black | |
|--|--|--|--|--|--|--|--------------------------------------|--|--|--|

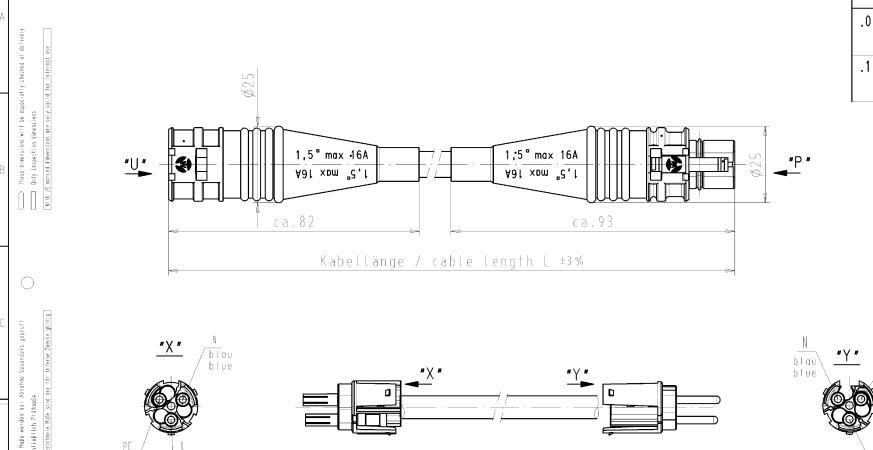

Kabellänge / cable length L ±3%

Weitere Daten siehe Katalog
further data see catalog

| | | | |
|--------------------|--------------------|---|-----------------------|
| Teile-Nr. part-no. | L | Beispiel (Farbe: schwarz) example (colour: black) | Typ type |
| 96.232.XX00.F | XX in dm-Schritten | 96.232.1000.1 = 10dm/L= 1000mm | RST2013K1BS 15P 10SW |
| U6.232.XX00.F | XX in m-Schritten | U6.232.1200.1 = 12 m/L=12000mm | RST2013K1BS 15P X12SW |

Typ/type: RST2013K1BS 15P .. GL = lichtgrau/light grey
SW = schwarz/black

| | | | | | | |
|---|-------|-----------|------|---|-------------------|---|
| Material | 2005 | Tap/Gate | None | Zeichnung Nr./Drawing No. | 96.232.0400.0 01K | h |
| Material | 24.10 | Parameter | T | Instal. easy system / Instal. easy system | | |
| Konfekt-Leitung | | | | | | |
| Instal. easy system / Instal. easy system | | | | | | |
| Buchse/Stecker / male/female | | | | | | |
| Crimpsührung / crimp design 61.250V 16A | | | | | | |

16.02.2007
 21.02.2007
 23.02.2007
 18.07.2007
 19.07.2007

Wieland Elektrische Verbindungen
 00-PEM-08/91