


60320100

Cylindrical fuse without striker gG type 22x58 500Vac 100A

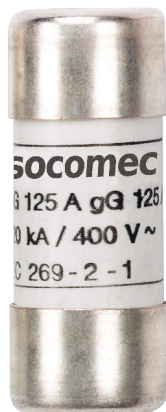

Industrial fuses protect installations and people from overcurrents for any low voltage electrical circuit.

Strong points

- High-performance
- Increased reliability
- Improved safety

General characteristics

- High-performance.
- High level of reliability.
- Improved safety.

Compliance with standards

- IEC 60269-1
- IEC 60269-2

Access to resources (ex: manuals)

Classification

UNSPSC	39121609
ETIM Class	EC002704
IGCC	4905

Commerce

Effective date	1988-04-15
Country of origin	ES

ETIM - Electrical characteristics

Voltage type	AC
Rated current [A]	100
Rated operating frequency [Hz]	50..60

ETIM - Mechanical characteristics

Size	22x58 mm
------	----------

ETIM - Technical features

Model	Ceramic fuse
-------	--------------

Logistics

GTIN/EAN	3596031377916
Customs number	8536109090
Price unit	PC
Weight of the packing unit [kg]	0.05
Length of the packing unit [m]	0.022
Width of the packing unit [m]	0.022
Depth of the packing unit [m]	0.058

Norms

Conformity to standards	IEC
-------------------------	-----

Technical Characteristics

Length of the product unit [mm]	58
Width of the product unit [mm]	22.2
Weight [kg]	0.05
Fuse melting indicator	without striker
Fuse size	22x58
Rated voltage	500 VAC
Rated current [A]	100
Type	gG