


Product data sheet

Item No. 56.710.9053.0

Earth terminal WKF 10 SL/35

Ground DIN rail terminal block with spring clamp connection for mounting on TS 35, nominal cross section 10 mm², width 10 mm, color gray

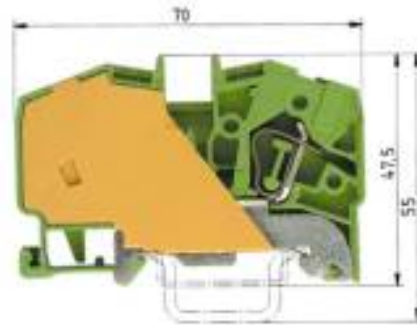

| | |
|------------|---------------|
| Item No. | 56.710.9053.0 |
| EAN | 4015573501690 |
| Order Unit | 50 Piece(s) |

Certificates / Approvals



Technical data

General

| | |
|--|-----------------------------------|
| Nominal cross section | 10 mm ² |
| Colour | Green/yellow |
| Number of levels | 1 |
| Number of clamp positions per level | 2 |
| Width/grid dimension | 10 mm |
| Insulating housing | PA666 |
| Inflammability class of insulation material acc. with UL94 | V0 |
| Explosion-tested version "Ex e" | Yes |
| Mounting method | DIN rail (top hat rail) 35/7.5 mm |
| Terminal blocks for electrical installations | Yes |

Technical data

| | |
|-----------------------------|---------------|
| Rated impulse voltage | 8 kV |
| Pollution degree | 3 |
| Closing plate required | No |
| Type of insulation material | Thermoplastic |
| Length | 70 mm |

Connection Data

| | |
|-------------------------------------|--------------------------|
| Connection type 1 | Tension clamp connection |
| Connection type 2 | Tension clamp connection |
| Minimum cross section solid | 2.5 mm ² |
| Maximum cross section solid | 10 mm ² |
| Minimum cross section fine stranded | 2.5 mm ² |

| | |
|-------------------------------------|--------------------|
| Maximum cross section fine stranded | 10 mm ² |
| Wire strip length | 13 mm |

Technical Data UL/CSA

| | |
|-------------------|----------|
| Cross section UL | 24-6 AWG |
| Cross section CSA | 14-6 AWG |

Technical drawing

70
Ansicht ohne Isolierplatte
opinion without insulating clamp

10

47,5
55

Hutschiene EN 60715-35x7,5
mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
mounting rail EN 60715-35x15

Isolierplatte (Farbe: gelb)
insulating clamp (colour: yellow)

Weitere Daten siehe Katalog
further data see catalog

| | | | | | |
|------------------------|---|------------------|---|------------|------------------------------------|
| Freigegeben nach DIN | CSB - Zeichnung, keine messen an Bauteilen | 1. Verwendung: - | Bl: 1 | sw: 1 | Index |
| MOBStab | Werkstoff und Oberfläche: Farbe: grau color: grey | 2002 | Tag | Name | Zeichnung Nr. 56.710.9053.0 01K |
| / | Erworfen | 12.11. | | Schreibdr: | |
| / | geprüft | - | | | Ersatz für: - |
| / | Normgr. | | | | |
| / | wieland | Typ | Benennung | | |
| / | Elektrische Verbindungen | YKF 10 SL/ 35 | SCHUTZLEITERKLEMME earth terminal (screwless) schraubenlos | | |
| Veränd. (Name / Titel) | Änderung | | | | |

567103050001C_4 CA36028 Schneider 19.11.2002 14:46:32 1,000